




A company of SIM Tech

# **SIM7100\_SIM7500\_SIM7600**

## **\_Sleep Mode\_Application**

### **Note\_V1.01**

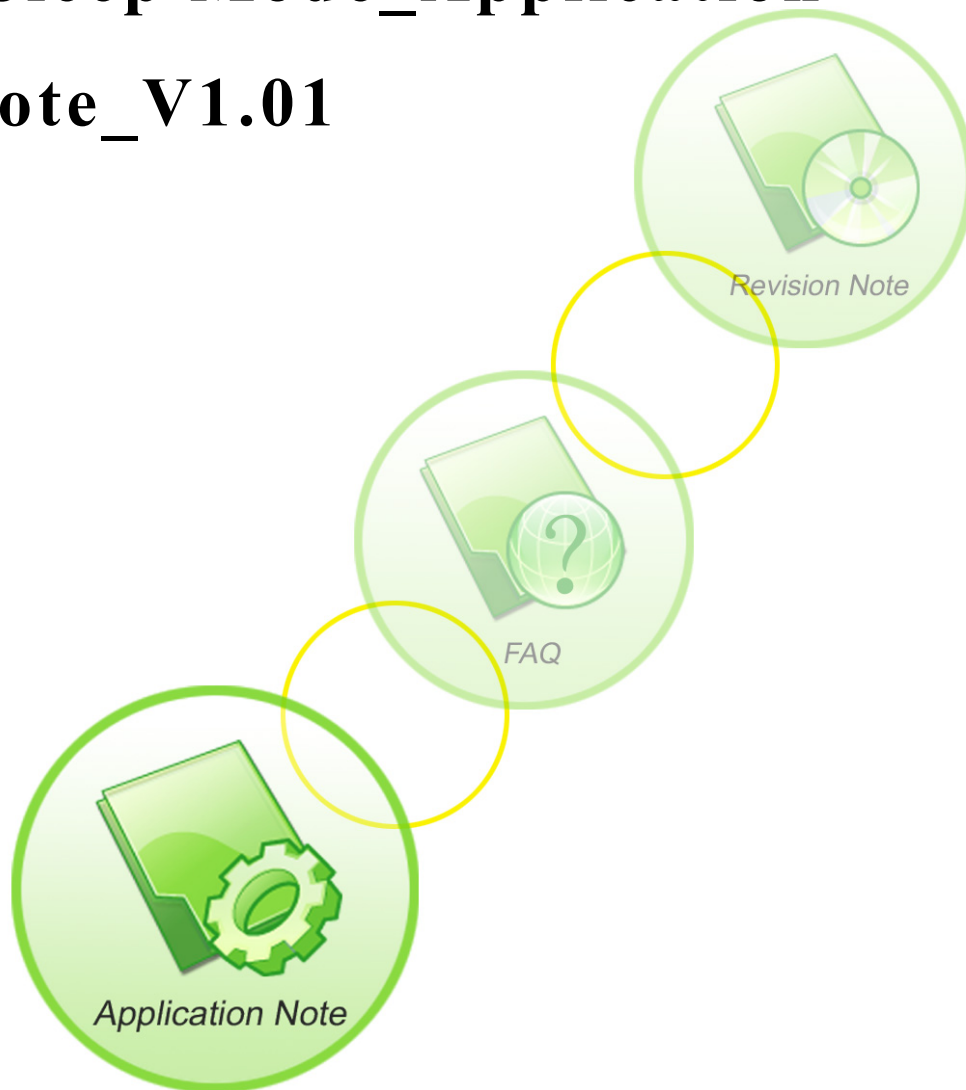

<b>Document Title:</b>	SIM7100_SIM7500_SIM7600 _Sleep Mode_Application Note
<b>Version:</b>	1.01
<b>Date:</b>	2017-07-18
<b>Status:</b>	Release
<b>Document ID:</b>	SIM7100_SIM7500_SIM7600_Sleep Mode_Application Note_V1.01

### General Notes

Simcom offers this information as a service to its customers, to support application and engineering efforts that use the products designed by Simcom. The information provided is based upon requirements specifically provided to Simcom by the customers. Simcom has not undertaken any independent search for additional relevant information, including any information that may be in the customer's possession. Furthermore, system validation of this product designed by Simcom within a larger electronic system remains the responsibility of the customer or the customer's system integrator. All specifications supplied herein are subject to change.

### Copyright

This document contains proprietary technical information which is the property of SIMCOM Limited., copying of this document and giving it to others and the using or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights reserved in the event of grant of a patent or the registration of a utility model or design. All specification supplied herein are subject to change without notice at any time.

**Copyright © Shanghai SIMCom Wireless Solutions Ltd. 2017**

## Version History

Date	Version	What is new	Author
2016-07-09	1.00	New version	Dongshan.liu
2017-07-18	1.01	Scope: Add SIM7500, SIM7600 series	Dongshan.liu
		Add 3.2 Note 3)	
		Add chapter 4.Sleep or wakeup state	

### Scope

This document presents the AT command of sleep mode operation and application examples. This document can apply to SIM7X00 series modules, including SIM7100, SIM7500, SIM7600 series.

## Contents

Version History .....	8
Scope.....	8
Contents .....	9
1 Introduction.....	10
2 Sleep Condition.....	11
2.1 UART Condition.....	11
2.2 USB Condition.....	11
2.3 Software Condition.....	12
3 Wakeup Condition.....	13
3.1 Wakeup SIM7X00 Module.....	13
3.2 Wakeup Host.....	13
4 Sleep or Wakeup State.....	15

## 1 Introduction

SIM7X00 can enter into sleep mode automatically to conserve power when some conditions are satisfied. From working mode to sleeping mode, the module takes about 15 to 20 seconds. During sleeping mode, SIM7X00 can still receive paging, SMS and voice call from network.

This document describes what conditions are required to make the module enter into sleep mode and how to wakeup the module or how to wakeup the host by module.

SIMCOM CONFIDENTIAL FILE

## 2 Sleep Condition

Several hardware and software conditions must be satisfied together in order to let SIM7X00 enter into sleep mode:

1. UART condition
2. USB condition
3. Software condition

### 2.1 UART Condition

**If TE do use UART interface**, must take care of this condition, DTR pin can be used as UART sleep indicator.

Host device must be send AT+CSCLK=1 command to module for enable sleep function, add use DTR as an indicator to let SIM7X00 module enter into sleep mode or sleep mode.

UART is ready to enter into sleep mode if DTR pin is pulled up.

UART is ready to exit from sleep mode if DTR pin is pulled down.

**If TE does not use UART interface**, can be use AT+CUARTRM=1 disable UART function, and module will be ignore UART condition when it going to sleep.

**So module default cannot enter sleep mode, if module need sleep, UART must be enter sleep mode or disable mode.**

### 2.2 USB Condition

If use USB interface one must take care of this condition, otherwise will make this interface unconnected.

If host side CPU supports USB suspend mode, there has noting to do, since the USB controller will send suspend command to module if the BUS is idle for some time.

If host side CPU doesn't support USB suspend mode, host needs to cut off USB\_VBUS line in order to let module enter into sleep mode. One can use a host GPIO to control an analog switch on/off.

If PC host is Windows OS, then needs to do items below.

#### 1) USB Interface

The USB device is a composite device. Customer can use AT+CUSBPIDSWITCH to switch the USB PID, it provides eight PIDs from 9000 to 9007. Different PID composite device has different interface. If the SIM700 module needs to go to sleep, the composite device can not have the

ADB and mass storage interfaces, because if the composite has the ADB and mass storage interfaces. The PC host will not send the USB suspend command to the SIM700 module. The PID 9000 in default has not the adb and mass storage interfaces.

And user also can use the `AT+CUSBDELETEADB=1(SIM7100)` or `AT+CUSBADB=0(SIM7500,SIM7600)` to remove the adb and mass storage interfaces of the composition device.

## 2) Windows registry

In the registry, under `HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\services\simusbser`, define or redefine the following keys: `QCDriverSelectiveSuspendIdleTime(DWORD)` with a value 5 (may vary),

The key `QCDriverSelectiveSuspendIdleTime` defines the time (in seconds) for the host PC waits before the device entering into suspend. The value assigned to this key is a value range from 3 to 120 sec.

## 3) Device manager

- a) Navigate to the desired device, which, in this example, is the modem.
- b) Open the device's Properties.
- c) On the Power Management tab, check Allow the computer to turn off this device to save power.
- d) Then check Allow this device to wake the computer.
- e) Click OK.

If the host is the embed system. The host need send suspend command to make the USB suspend.

## 2.3 Software Condition

SIM7X00 module must in idle mode (no data transmission, no audio playing, no other at command running and so on) in order to let SIM7X00 module enter into sleep mode.

Follow this table is module sleep conditions by connect port.

Condition \ Connect port	UART	USB	Software
UART	✓		✓
USB	✓	✓	✓
USB+ UART	✓	✓	✓

## 3 Wakeup Condition

### 3.1 Wakeup SIM7X00 Module

SIM7X00 module can exit from sleep mode automatically when the following events are satisfied:

- Receive a SMS.
- Have an Incoming call.

SIM7X00 module can exit from sleep mode manually when the following events are happened:

- UART event, DTR is pulled down if wants to wakeup module.
- USB event

Host sends a command to module when in suspend mode or Host connects the USB interface when host cuts off the USB\_VBUS line.

### 3.2 Wakeup Host

In UART SIM7X00 uses RI pin to wake up the host only when incoming call happened, SMS received, and URC reported.

RI pin has same patterns to wakeup the host; the pin will stay high normally:

When URC reported this pin will set to low about 60ms to inform host and then reset to high automatically, depend on (AT+CFGRI=1).

When SMS received this pin will set to low about 120ms to inform host and then reset to high automatically.

When incoming voice call happened this pin will set to low about 5900ms and set to high about 100ms to inform host, it will loop this action until the host reset this pin with answer or hang up this call.

When incoming CSD call happened this pin will set to low about 100ms and set to high about 5900ms to inform host, it will loop this action until the host reset this pin with answer or hang up this call.

#### NOTE:

- 1) *If user set the AT + CFGRI =1, the pin "RI" will be set low by receiving SMS , incoming voice (CSD) call and any URC report.*
- 2) *If user set the AT + CFGRI =0(Default setting), the pin "RI" will be set low by receiving SMS and incoming voice (CSD) call only.*
- 3) *SIM7500/SIM7600 series does not support CSD feature.*



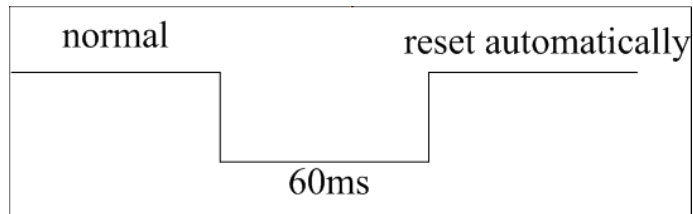


Figure 1: UART RI behavior when URC reported

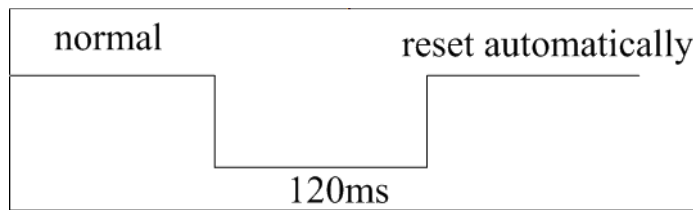


Figure 2: UART RI behavior when SMS received

SIMCOM CONFIDENTIAL FILE

## 4 Sleep or Wakeup State

Module can use NETLIGHT pin as an indicator of sleep or wakeup state, NETLIGHT pin only depend on UART state add network state, don't care USB state.

If module from wakeup to sleep state, NETLIGHT pin set to low.

If module from sleep to wakeup state, NETLIGHT pin set to high, add NETLIGHT pin will be go to breathing state, in breathing state, breathing rate depends on network state.

The LED status is listed in the following table.

Table 1: Network Status Indication LED Status

LED Status	Module Status
On	Searching Network; Call Connect(include VOLTE, SRLTE)
200ms On, 200ms Off	Data Transmit; 4G registered
800ms On, 800ms Off	2G/3G registered network
Off	Power off; Sleep

## Contact us

### Shanghai SIMCom Wireless Solutions Ltd.

Address: Building A, SIM Technology Building, No.633, Jinzhong Road, Changning District, Shanghai 200335

Tel: 86-21-32523300

Fax: 86-21-32523020

Email: [simcom@sim.com](mailto:simcom@sim.com)

Website: [www.simcomm2m.com](http://www.simcomm2m.com)

SIMCOM CONFIDENTIAL FILE